

MASONRY PROJECT #51

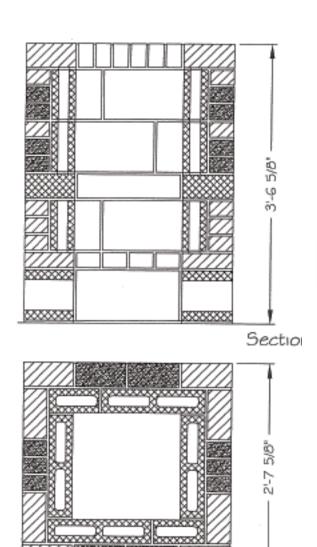

2'-7 5/8"

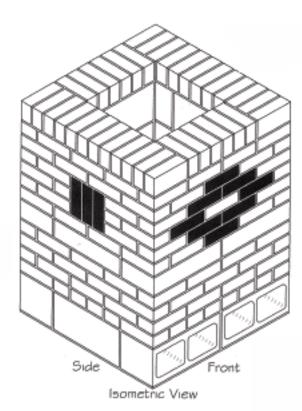

Bon Tool Co. does not guarantee the accuracy of the data. Please report errors and submit suggestions to Bon Tool Co.

INSTRUCTIONS

- 1. Build wall as shown.
- 2. All sides, ends and top to be finished with concave joints.
- 3. Project may be cleaned by 'dry brushing' only.
- 4. Build with coursing scale required to meet eimensions provided.

MATERIALS REQUIRED

- 1. 10 8" CMU
- 2. 5 6" CMU
- 3. 5 4" CMU
- 4. 2 Half 6" CMU
- 5. 2 Half 4" CMU
- 6. 121 Modular Brick Type A
- 7. 15 Modular Brick Type B
- 8. 28 Uncored Modular Brick Type A

BonTool Co.

Gibsonia, PA 15044 • USA • 724-443-7080 • www.bontool.com