



Assembling the Roof Rake and Adjusting the Handle


1. Unscrew the handle knob and extend the pole to expose the small holes (Fig. 1).

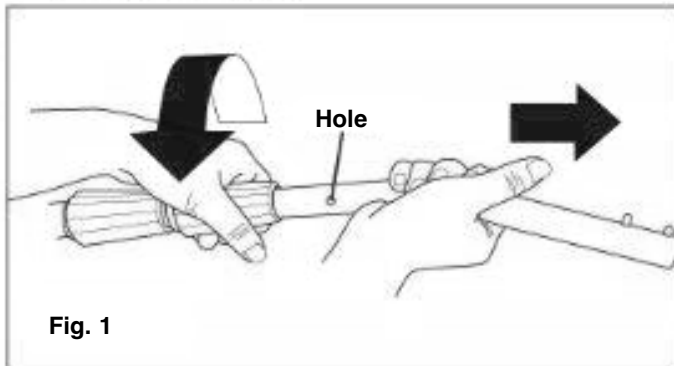


2. Depress the small buttons at the end of the handle so that you can insert the handle into the roof rake head (Fig. 2).

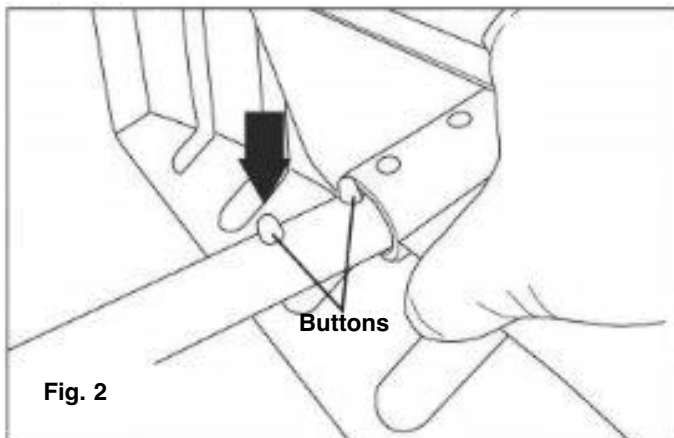

3. Using the hex key wrench, screw the metal braces to the roof rake head with the two short hex screws (Fig. 3).

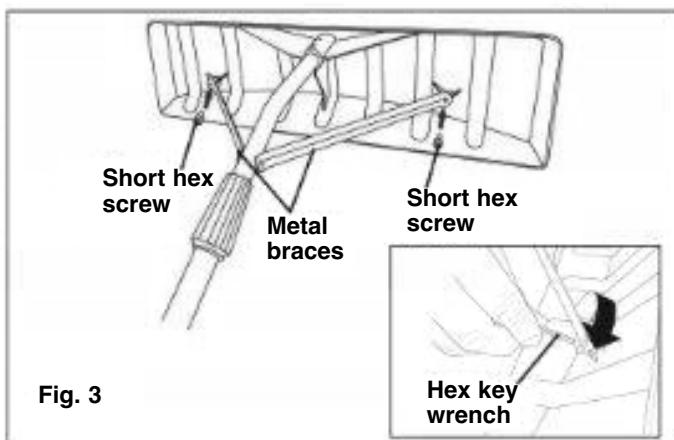

4. Affix the metal braces to the pole by threading the long hex screw through the metal braces and the pole. Secure the screw with the locking nut using the open end wrench (Fig. 4).

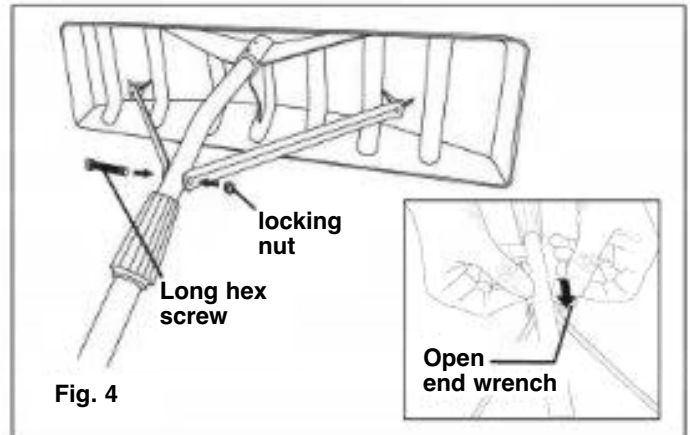

5. Lengthen the telescopic pole by rotating the handle knob clockwise and extending the pole to the desired length. Secure in position by twisting the knob counterclockwise (Fig. 5).

